

Modular Multiples®

Linears®
Recessed
Trimless/Trimmed
New/Old Work



This leaflet contains products covered under one or more of the following US Patent Numbers:

6,568,826B1	6,692,139B2
6,820,999B2	7,207,698B2
6,896,391B2	6,969,182B2
6,997,267B2	6,997,574B2
7,036,953B2	6,745,785B2
7,300,176B2	7,478,921B1
D520,666S	D530,038S
D537,553S	D819,857
D818,632	D818,624
D818,623	8,740,407
8,511,860	8,231,242
8,210,720	7,832,907

Modular International Inc.
3941 California Avenue
Pittsburgh, PA 15212
1-412-734-9000
www.modularinternational.com

Modular International, Inc. produced a major portion of the lighting for the project shown. The photograph, however, is not intended to imply that the various owners of the projects endorse our products or use our products exclusively.

Modular Multiples®

The Original Multiple Lamp Family of Fixtures



Linears®

Recessed - Trimless/Trimmed - New/Old Work



- Configurations:**
- Lamps spaced 6" on center or greater
 - Lamp size determines minimum width, maximum width is unrestricted
 - Articulated arms (optional) increase flexibility of orientation or hide lamp source
 - Available in symmetric and asymmetric configurations
 - Uses all LED modules and legacy lamp sources

- Housing:**
- Extruded aluminum profile with a series of internal steel plates – single lengths up to 10'
 - Connection hardware available for joining multiple pieces to make longer continual lengths
 - Available with extruded aluminum trim or trimless housing with spackle flange
 - 90° and 45° corner sections available

- Finishes:**
- Powder coated: white or black standard, custom colors available
 - Stainless steel / satin nickel available

- Electrical:**
- Internal electronic power supply(s) / transformer(s) / ballast(s) accessible through the aperture of the fixture
 - Dimmable (not applicable on HID products)
 - One power supply / transformer per lamp allowing for multi-circuit wiring
 - 120v and 277v available
 - Listed to UL1598 standards

Lamping:

Standard LED Modules

6w LED-506-6	12w LED-512-12	12w LED-512-22
8w LED-708-6	14w LED-714-12	14w LED-714-22
16w LED-716-12	16w LED-716-22	16w LED-716-45
30w LED-930-12	30w LED-930-22	30w LED-930-45

Direct Replacement LED or Legacy Lamps:

MR16LED (BLD)	MR16 HALOGEN (B)	MR16CMH (BH)
AR111LED (DLD)	AR111 HALOGEN (D)	CDMR111 (S)
PAR30LED (GLD)	PAR30 (G)	PAR30HID (H)
PAR38LED (JLD)	PAR38 (J)	PAR38HID (K)

Mounting:



- Fixture is designed to be supported from above with 3/8" (9mm) all-thread rods.
- Access plates for all thread attachment are positioned throughout the fixture body based on fixture length and lamp spacing allowing for access from below.
- In addition to the all thread rods, the Trimless models have a spackle flange that will allow for fixture to be secured to surrounding ceiling or wall structure via screws and flange covered with spackling compound for a smooth finished appearance.

Options:

- Patented die-cast aluminum ring sets and locking devices
- Pull down yokes
- Shielding cones
- Filter media
 - LED modules accept one 1/8" thick filter
 - LED direct replacement and legacy lamps accept up to two 1/8" thick filters

Model # example:

ML-2-LED/30-x-TI-REC-TR-(length)

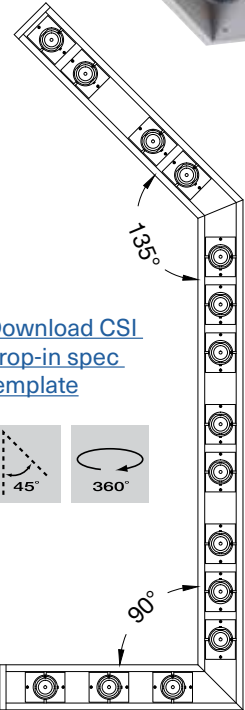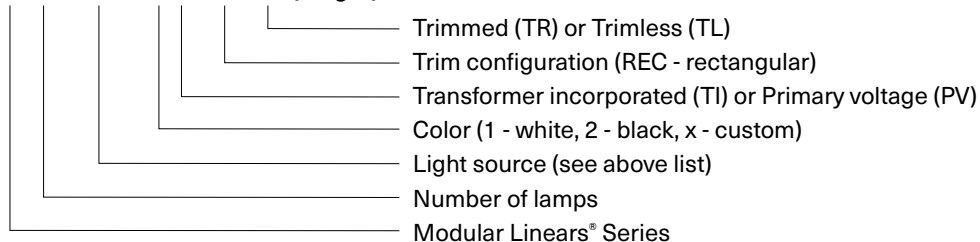

[Download CSI drop-in spec template](#)