


Modular International, Inc.

Disability Services Training Center - Washington, PA





Linear Wall Wash Uplights

LINEAR LED FIXTURE (MXLD-N-S-18-W)



LINEAR LED FIXTURE HOUSING (MXLD-N-S-18-W-24)

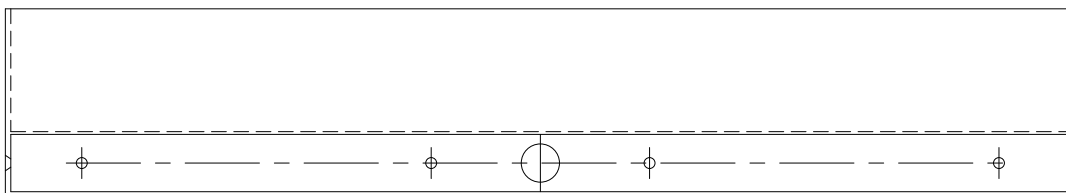

316 marine grade stainless steel housing, extruded aluminum linear LED fixture with tempered glass lens and powder coated finish. Lamping: 12 watts per foot at 3000°K with remote power supplies. **Customization options available. Consult factory for details.**

Linear LED fixtures available in the following lengths:

1'1" (335mm) 13w	3'0-3/4" (935mm) 38w
1'7" (485mm) 20w	3'4-3/4" (1035mm) 42w
2'1" (635mm) 26w	3'6-3/4" (1085mm) 47w
2'7" (785mm) 31w	4'0-5/8" (1235mm) 53w